

# Corning® SMF-28™ Optical Fiber

## Product Information



### PI1036

Issued: December 2001

Supersedes: April 2001

ISO 9001 Registered

## Corning® Single-Mode Optical Fiber

### The Standard For Performance

Corning® SMF-28™ single-mode optical fiber has set the standard for value and performance for telephony, cable television, submarine, and utility network applications. Widely used in the transmission of voice, data, and/or video services, SMF-28 fiber is manufactured to the most demanding specifications in the industry. SMF-28 fiber meets or exceeds ITU-T Recommendation G.652, TIA/EIA-492CAAA, IEC Publication 60793-2 and GR-20-CORE requirements.

Taking advantage of today's high-capacity, low-cost transmission components developed for the 1310 nm window, SMF-28 fiber features low dispersion and is optimized for use in the 1310 nm wavelength region. SMF-28 fiber also can be used effectively with TDM and WDM systems operating in the 1550 nm wavelength region.

### Features And Benefits

- Versatility in 1310 nm and 1550 nm applications.
- Outstanding geometrical properties for low splice loss and high splice yields.
- OVD manufacturing reliability and product consistency.
- Optimized for use in loose tube, ribbon, and other common cable designs.

### The Sales Leader

Corning SMF-28 fiber is the world's best selling fiber. In 2000, SMF-28 fiber was deployed in over 45 countries around the world. All types of network providers count on this fiber to support network expansion into the 21st Century.

## Protection And Versatility

SMF-28 fiber is protected for long-term performance and reliability by the CPC® coating system. Corning's enhanced, dual acrylate CPC coatings provide excellent fiber protection and are easy to work with. CPC coatings are designed to be mechanically stripped and have an outside diameter of 245 μm. They are optimized for use in many single- and multi-fiber cable designs including loose tube, ribbon, slotted core, and tight buffer cables.

## Patented Quality Process

SMF-28 fiber is manufactured using the Outside Vapor Deposition (OVD) process, which produces a totally synthetic ultra-pure fiber. As a result, Corning SMF-28 fiber has consistent geometric properties, high strength, and low attenuation. Corning SMF-28 fiber can be counted on to deliver excellent performance and high reliability, reel after reel. Measurement methods comply with ITU recommendations G.650, IEC 60793-1, and Bellcore GR-20-CORE.

## Optical Specifications

### Attenuation

#### Standard Attenuation Cells

Wavelength (nm)	Attenuation Cells (dB/km)	
	Premium *	Standard
1310	≤0.35	≤0.40
1550	≤0.25	≤0.30

\* Lower attenuation available in limited quantities.

### Point Discontinuity

No point discontinuity greater than 0.10 dB at either 1310 nm or 1550 nm.

### Attenuation at the Water Peak

The attenuation at 1383 ± 3 nm shall not exceed 2.1 dB/km.

#### Attenuation vs. Wavelength

Range (nm)	Ref. λ (nm)	Max. α Difference (dB/km)
1285 - 1330	1310	0.05
1525 - 1575	1550	0.05

The attenuation in a given wavelength range does not exceed the attenuation of the reference wavelength (λ) by more than the value α.

## Attenuation with Bending

Mandrel Diameter (mm)	Number of Turns	Wavelength (nm)	Induced Attenuation* (dB)
32	1	1550	≤0.50
50	100	1310	≤0.05
50	100	1550	≤0.10

\*The induced attenuation due to fiber wrapped around a mandrel of a specified diameter.

### Cable Cutoff Wavelength (λ<sub>ccf</sub>)

$$\lambda_{ccf} \leq 1260 \text{ nm}$$

### Mode-Field Diameter

$$9.2 \pm 0.4 \text{ } \mu\text{m at 1310 nm}$$

$$10.4 \pm 0.8 \text{ } \mu\text{m at 1550 nm}$$

### Dispersion

Zero Dispersion Wavelength (λ<sub>0</sub>):

$$1302 \text{ nm} \leq \lambda_0 \leq 1322 \text{ nm}$$

Zero Dispersion Slope (S<sub>0</sub>):

$$\leq 0.092 \text{ ps}/(\text{nm}^2 \cdot \text{km})$$

$$\text{Dispersion} = D(\lambda) \approx \frac{S_0}{4} \left[ \lambda - \frac{\lambda_0^4}{\lambda^3} \right] \text{ ps}/(\text{nm} \cdot \text{km}),$$

for 1200 nm ≤ λ ≤ 1600 nm

λ = Operating Wavelength

### Polarization Mode Dispersion

#### Fiber Polarization Mode Dispersion (PMD)

	Value (ps/√km)
PMD Link Value	≤ 0.1*
Maximum Individual Fiber	≤ 0.2

\* Complies with IEC SC 86A/WG1, Method 1, September 1997.

The PMD link value is a term used to describe the PMD of concatenated lengths of fiber (also known as the link quadrature average). This value is used to determine a statistical upper limit for system PMD performance.

Individual PMD values may change when cabled. Corning's fiber specification supports network design requirements for a 0.5 ps/√km maximum PMD.

## Environmental Specifications

Environmental Test Condition	Induced Attenuation (dB/km)	
	1310 nm	1550 nm
Temperature Dependence -60°C to +85°C*	≤0.05	≤0.05
Temperature-Humidity Cycling -10°C to +85°C*, up to 98% RH	≤0.05	≤0.05
Water Immersion, 23°± 2°C*	≤0.05	≤0.05
Heat Aging, 85°± 2°C*	≤0.05	≤0.05

\*Reference temperature = +23° C

### Operating Temperature Range

-60°C to +85°C

## Dimensional Specifications

**Standard Length (km/reel):** 2.2 - 50.4\*

\* Longer spliced lengths available at a premium.

### Glass Geometry

Fiber Curl: ≥ 4.0 m radius of curvature

Cladding Diameter: 125.0 ± 1.0 μm

Core-Clad Concentricity: ≤ 0.5 μm

Cladding Non-Circularity: ≤ 1.0%

Defined as:  $\left[ 1 - \frac{\text{Min. Cladding Diameter}}{\text{Max. Cladding Diameter}} \right] \times 100$

### Coating Geometry

Coating Diameter: 245 ± 5 μm

Coating-Cladding Concentricity: <12 μm

## Mechanical Specifications

### Proof Test

The entire fiber length is subjected to a tensile proof stress ≥ 100 kpsi (0.7 GN/m<sup>2</sup>)\*.

\* Higher proof test levels available at a premium.

## Performance Characterizations

*Characterized parameters are typical values.*

**Core Diameter:** 8.2 μm

**Numerical Aperture:** 0.14

NA is measured at the one percent power level of a one-dimensional far-field scan at 1310 nm.

**Zero Dispersion Wavelength (λ<sub>0</sub>):** 1313 nm

**Zero Dispersion Slope (S<sub>0</sub>):** 0.086 ps/(nm<sup>2</sup>•km)

**Refractive Index Difference:** 0.36%

**Effective Group Index of Refraction, (N<sub>eff</sub> @ nominal MFD):**

1.4677 at 1310 nm

1.4682 at 1550 nm

**Fatigue Resistance Parameter (n<sub>d</sub>):** 20

**Coating Strip Force:**



Dry: 0.6 lbs. (3N)

Wet, 14-day room temperature: 0.6 lbs. (3N)

**Rayleigh Backscatter Coefficient (for 1 ns pulse width):**

1310 nm: -77 dB

1550 nm: -82 dB

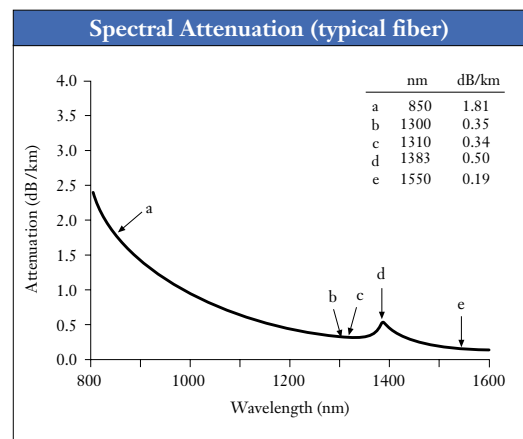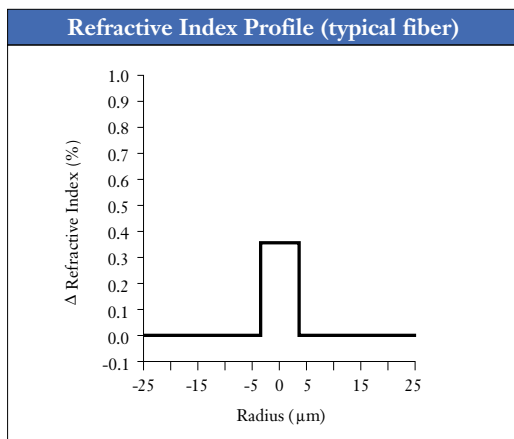

## Ordering Information

To order Corning® SMF-28™ fiber, contact your sales representative, or call the Optical Fiber Customer Service Department at **910-784-7659** (North America) and **607-974-7174** (International). Please specify the following parameters when ordering.

**Fiber Type:** Corning® SMF-28™ Fiber

---

**Fiber Attenuation Cell:**           dB/km

---

**Fiber Quantity:**               km

---

**Other:** (Requested ship date, etc.)

---

### Corning Incorporated [www.corning.com/opticalfiber](http://www.corning.com/opticalfiber)

One Riverfront Plaza  
Corning, NY 14831  
U.S.A.

Phone: 800-525-2524 (U.S. and Canada)  
607-786-8125 (International)

Fax: 800-539-3632 (U.S. and Canada)  
607-786-8344 (International)

Email: [cofic@corning.com](mailto:cofic@corning.com)

### Europe

Berkeley Square House  
Berkeley Square  
London W1X 5PE  
U.K.

Phone: 00 800 2800 4800 (U.K.\*, Ireland, France,  
Germany, The Netherlands, Spain and Sweden)

00 800 781 516 (Italy)

+44 7000 280 480 (All other countries)

Fax: +44 7000 250 450

Email: [eurocofic@corning.com](mailto:eurocofic@corning.com)

### Asia Pacific

Australia  
Phone: 1-800-148-690  
Fax: 1-800-148-568

Indonesia  
Phone: 001-803-015-721-1261  
Fax: 001-803-015-721-1262

Malaysia  
Phone: 1-800-80-3156  
Fax: 1-800-80-3155

Philippines  
Phone: 1-800-1-116-0338  
Fax: 1-800-1-116-0339

Singapore  
Phone: 800-1300-955  
Fax: 800-1300-956

Thailand  
Phone: 001-800-1-3-721-1263  
Fax: 001-800-1-3-721-1264

### Latin America

Brazil  
Phone: 000817-762-4732  
Fax: 000817-762-4996

Mexico  
Phone: 001-800-235-1719  
Fax: 001-800-339-1472

Venezuela  
Phone: 800-1-4418  
Fax: 800-1-4419

### Greater China

Beijing  
Phone: (86) 10-6505-5066  
Fax: (86) 10-6505-5077

Hong Kong  
Phone: (852) 2807-2723  
Fax: (852) 2807-2152

Shanghai  
Phone: (86) 21-3222-4668  
Fax: (86) 21-6288-1575

Taiwan  
Phone: (886) 2-2716-0338  
Fax: (886) 2-2716-0339

E-mail: [GCCofic@corning.com](mailto:GCCofic@corning.com)

Corning is a registered trademark. SMF-28 and CPC are trademarks of Corning Incorporated, Corning, N.Y.

©2001, Corning Incorporated